

GMA WALL MOUNT CABINETS



Installation can be optional for standing or wall mounting.



Earthing screw



Adjustable mounting rails front and back

STANDARD

- Comply with ANSI/EIA RS-310-D, DIN41497 part 1, IEC297-2, DIN1494 Part 7, GB/T3047.2-92 Standard

FEATURES

- Welded Frame, Reliable Structure
- GMA Wall Mounted Cabinet
- Rigid Frame Structure w. Load Rating of 60 Kg
- Exquisite Design w. Precise Dimension & Craftsmanship
- Tempered Glass Front Door
- Turning angle of front door is over 180 degrees
- Cable Entry From Top and Bottom
- Quickly removable side panels for easy cabinet installation , and can be re-hinged from either side
- Provision For Optional Lock
- Optional w. effective ventilation
- 2 Pairs of 19" Movable Vertical Extrusion
- Mounting Panel on the rear, easily installing
- Standing or Wall Mounting Installation
- Adjustable Mounting Rails Front & Back
- Various Optional Acc. are available

MATERIAL

- SPCC Cold Rolled Steel, high strength, high density and corrosion resistance
- Thickness : Mounting Profile : 1.5mm / Others : 1.2mm



SURFACE FINISH

- Degreasing, Pickling, Phosphoric, Powder Coated – Strong Anti-Corrosion
- Colours ID Numbers:

RAL7072 - RAL7035 - RAL9004 - RAL9005

MAIN STRUCTURE

1. Top Cover
2. 2. Frame
3. Front Door
4. Side Panel
5. Rail
6. L. Fixed Shelf
7. Back Panel
8. Beam
9. Bottom
10. Lock

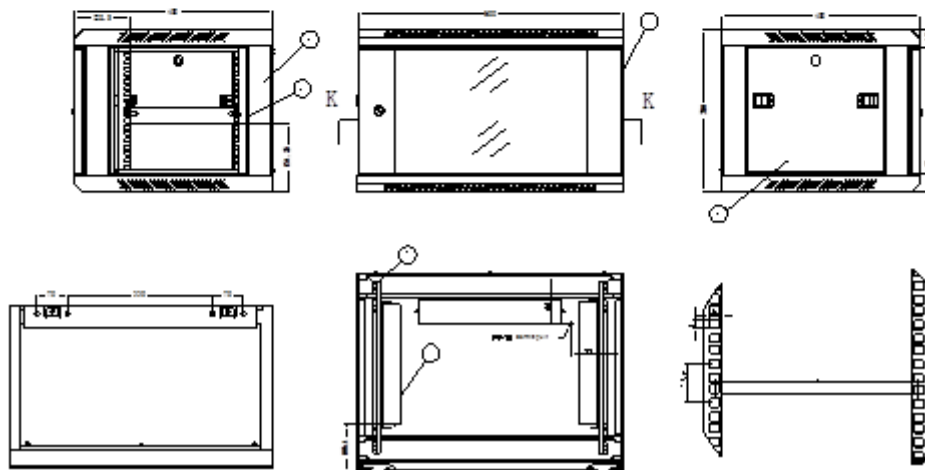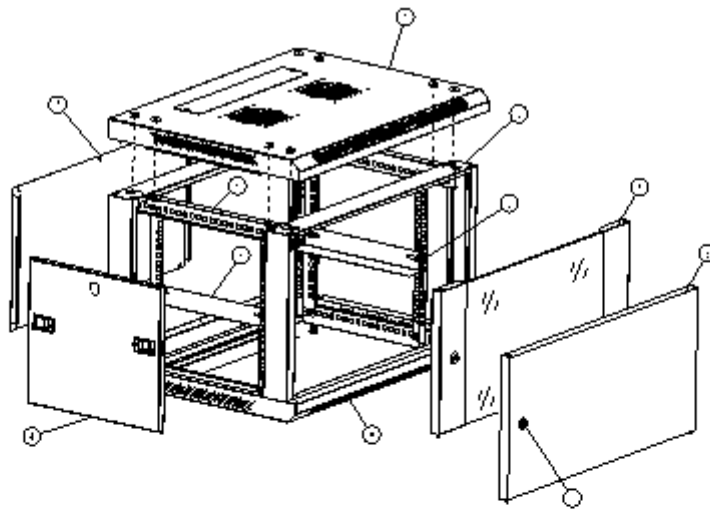

MAIN PARTS

S/ N	DESC.	QT	UNI T	MATERIAL	SURFACE FINISH	REMARKS
1	Top Cover	1	PC	SPCC Cold Rolled Steel t1.0	Powder Coated	
2	Frame	2	SET	SPCC Cold Rolled Steel t1.0	Powder Coated	
3	Front Door	1	PC	5 mm Toughened Glass Door / SPCC t1.2	Powder Coated	
4	Slide Panel	2	PC	SPCC Cold Rolled Steel t1.0	Powder Coated	
5	Rail	4	PC	SPCC Cold Rolled Steel t1.2	Powder Coated	
6	L Fixed Shelf	2	PC	SPCC Cold Rolled Steel t1.0	Powder Coated	
7	Back Panel	1	PC	SPCC Cold Rolled Steel t1.2	Powder Coated	
8	Beam	4	PC	SPCC Cold Rolled Steel t1.2		
9	Bottom	1	PC	SPCC Cold Rolled Steel t1.0		W. 2 Keys
10	Lock	1	PC			
11	Hexagonal Spiral	16	PC	Stainless Steel	Deactivation	
12	Flange Nut	16	PC	Stainless Steel	Deactivation	
13	Cross Screw	12	PC	Stainless Steel	Deactivation	
14	Card Buckle	12	PC	Stainless Steel	Deactivation	

SPECIFICATION

MODEL NO.	CAPACITY (U)	WIDTH (mm)	DEPTH (mm)	HEIGHT (mm)	PACKING DIMENSION W X D X H	VOLUME CBM
GMA6406	6	600	450	370	620*470*250	0.0729
GMA6409	9	600	450	500	620*520*250	0.0806
GMA6412	12	600	450	635	620*650*170	0.0685
GMA6415	15	600	450	770	620*700*170	0.0738
GMA6606	6	600	600	370	620*620*250	0.0961
GMA6609	9	600	600	500	620*620*250	0.0961
GMA6612	12	600	600	635	620*650*170	0.0685
GMA6615	15	600	600	770	620*700*170	0.0738
GMA6112	12	600	150	635	620*700*170	0.0690