
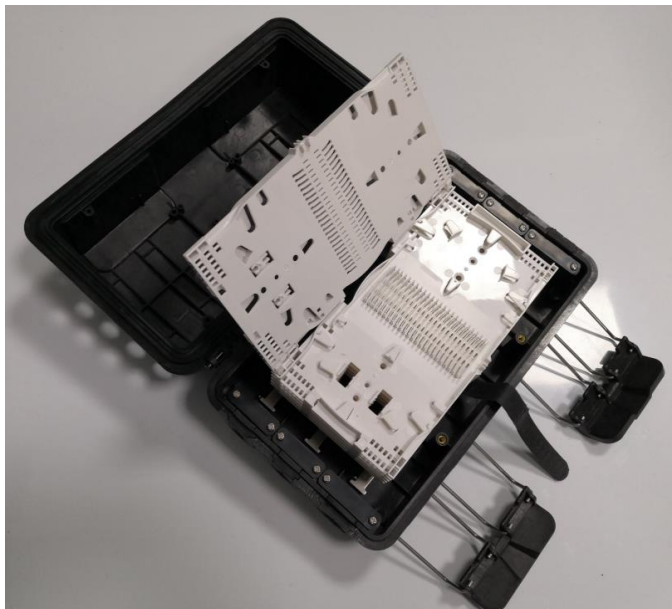


## FIBER OPTIC SPLICE CLOSURE JZ-10077-L (48C,72C)

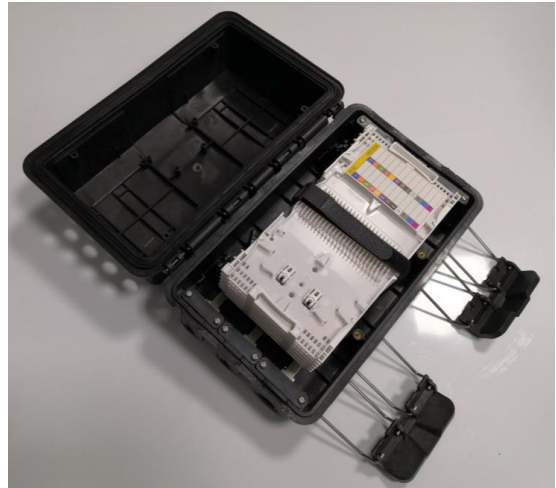

### General Description

This splice closure is an indispensable equipment used in Fiber communication system, play the roles in sealing, protection, installation of fiber connector head and storage, it is applicable well in cable splicing and with the protection function on fiber optic connect head .

## Features

- ◆ Suitable for straight-through, diverging and connection of FTTH ,FTTB passive network
- ◆ Use material of high strength PP plastics
- ◆ Trays can be increased or reduced according to the application
- ◆ Good protection against dust and moisture
- ◆ IP PROTECTION LEVEL : 68

## Applications

- ◆ Telecommunication subscriber loop
- ◆ Fiber to the home (FTTH)
- ◆ LAN/WAN

## Technical data

Work temperature	-40°C to +75°C
Relative humidity	≤85%
Atmospheric pressure	70Kpa to 106Kpa
Standard	YD/T814.1-2004
Cable entrance	2*(8-20mm),4*(5-14mm)
Max capacity	Splice: 144 cores, Max 6 trays, 24Core per Tray

## Dimensions

292mm \*185mm\*120mm

