


CAT6 KEYSTONE JACK

CNKJRS16-W

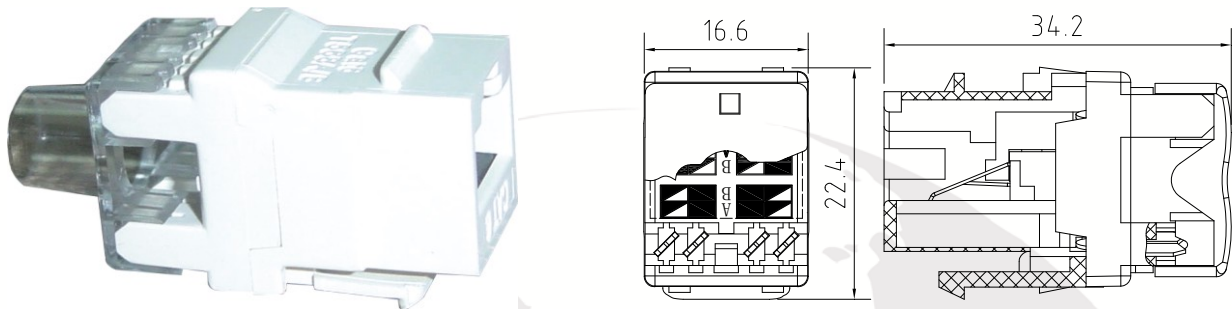

Specifications

- Size: 16.6×22.4×34.2mm
- Color: White
- Krone IDC
- Criteria: ISO/IEC11801
- CAT6

Environment Characteristic

- Temperature: -20°C ~ +70°C
- Relative humidity: max90% at 20°C

Mechanical Performance

Material:

JACK: ABS (UL94V-0)

Gold pin: Sn6.5-0.1(Y)

thickness of gold coated: 6u"/15u"/30u"/50u"

Contactors: Sn6.5-0.1(Y)

Thickness of silver coated: 0.5um

IDC: Copper conductor 0.4~0.7mm, max.

Connections>200 times

Sockets: max. Insertions>700 times

Electrical Performance

Contact Resistance (excluding body resistance)
 ≤5mΩ (under normal air condition)

Insulation Resistance: ≥1000MΩ (under normal
 air condition)

Dielectric intensity: DC 1200V, no spark over
 and fly arc in 1 min.

HONG KONG (HK) Limited

Unit 1303, 13/F, Beverly House, 93 -107 Lockhart Road, Wanchai, Hong Kong.
 香港灣仔駱克道93107-號利臨大廈13樓1303室

Tel. : (852) 28639635 Fax : (852) 21296534 Mob.: (86) 18218762001

EGYPT

15 Sakalia St., From Makram Abeed, 3rd Floor, Nasr City, Cairo, Egypt.

Tel. : +202 2671 8862 / 3 Fax : +202 2275 2976 Mob.: +2012 2213 3810