


Cat.6 24 PORT PATCH PANEL

CNSP-1050-24

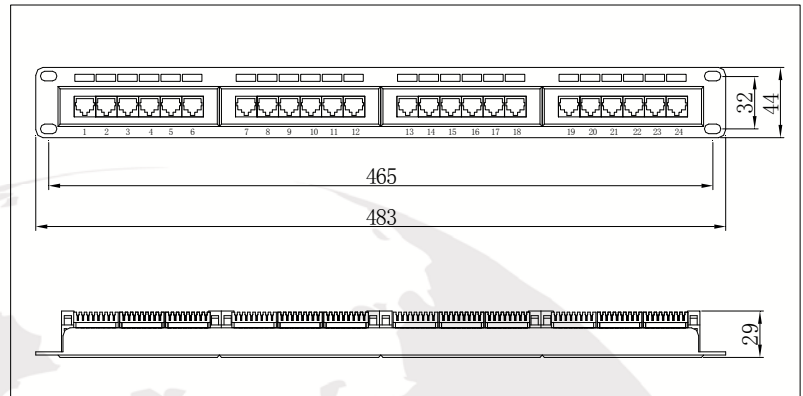

Specifications

- Qualified Cat.6 Permanent Link/Channel of
- EIA T568A and T568B ISO/IEC11801
- 24port-19"-1U Height

Gold plating:

3u"、6 u"、 15u"、 30 u"、 50 u"

Silver plating:

1.25 um、 5um

Modularity(110 block)

8-pin, 4-pair

Mechanical Performance

Insertion Life

750 cycles minimum

IDC Life

200 times(22-26 AWG Solid wire) minimum

Plug/Jack Contact Force

100 grams minimum using FCC-approved plug

Environment Characteristic

Storage Temperature

--40 to 70° C

Operating Temperature

--10 to 60° C

Relative Humidity

95%, no condensing

Electrical Performance

Insulation resistance

1000 Mohms minimum

Contact resistance

7 mohms maximum

Dielectric intensity

AC 1000 Vrms 50Hz or 60Hz in 60s