


## PATCH CORDS

## CNSPC-7021-STU

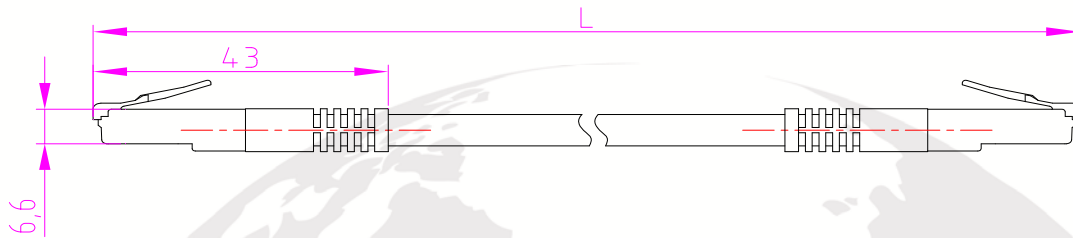

### Specification

Power Cat5e UTP Patch Cords are constructed of Unshielded 4-pair 24 AWG cable. Each Cat5e patch cord end is assembled with modular RJ-45 plug and color matched strain relief boots.

- Provides enhanced EMC protection and improved Alien Crosstalk performance.
- C5E component compliant.
- 4-pair stranded cables.
- Pro-terminated with 8W plugs.
- Available in varied lengths.
- Available in a variety of colors.
- ETL Verified .

### Mechanical characteristic Cable

Conductor Size: 24 AWG Stranded bare Copper  
 Dielectric material: PE  
 $\phi$  of Dielectric core: 7\*0.2mm  
 External Diameter: 5.2±0.2mm  
 Sheath: PVC  
 Temperature Range: -20°C to +60°C

### Electrical characteristic

Voltage: 150V  
 Current: 1.5A  
 Contact Resistance: max 20mΩ  
 Insulation Resistance: 500MΩ  
 Dielectric Withstanding Voltage: 1000V RMS  
 Operating temperature: -40°C to 85°C

### Plug

Operating Life: Min 750 insertion cycles  
 Contact Material: Phosphor Bronze  
 Contact Plating: 60 micro-inch gold  
 Material: Polycarbonate UL94 V-0

#### HONG KONG (HK) Limited

Unit 1303, 13/F, Beverly House, 93-107 Lockhart Road, Wanchai, Hong Kong.  
 香港灣仔駱克道93107-號利臨大廈13樓1303室

Tel. : (852) 28639635 Fax : (852) 21296534 Mob.: (86) 18218762001

#### EGYPT

15 Sakalia St., From Makram Abeed, 3<sup>rd</sup> Floor, Nasr City, Cairo, Egypt.

Tel. : +202 2671 8862 / 3 Fax : +202 2275 2976 Mob.: +2012 2213 3810