

## 4C FIBER BOX CM-1314-4A


### 22302 Fiber Access Terminal

#### Description

22302 fiber access termination box is able to hold up to 6 subscribers. It is used as a termination point for the feeder cable to connect with drop cable in FTTx network system. It integrates fiber splicing, splitting, distribution, storage and cable connection in one solid protection box



- Water-proof design with IP-65 Protection level.
- Integrated with splice cassette and cable management rods.
- Manage fibers in a reasonable fiber radius condition.
- Easy to maintain and extend the capacity.
- Fiber bend radius control more than 40mm.
- Suitable for the fusion splice or mechanical splice.
- 1\* 6 Splitter can be installed as an option.
- Efficient cable management.
- 2/4/6 ports cable entrance for drop cable.

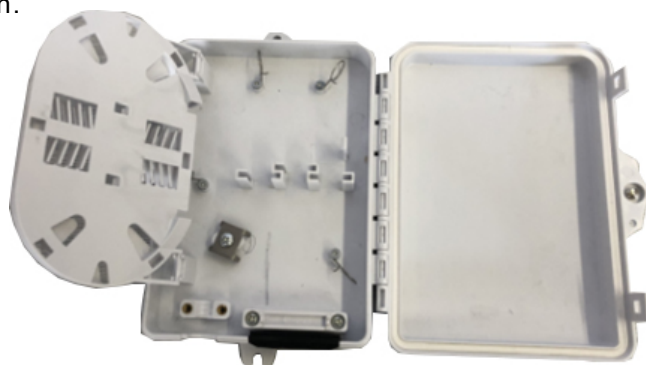

#### Configuration

Material	Size	Max Capacity	
30%ABS+70%PC	197*145*40 (mm)	SC adaptor 6 Ports	PLC:1*6 (SC)

#### Standard Accessories

Splice cassette and cable management tool, installation nuts and bolts, protection sleeves, hose clamp, rubber seal for cable entrance.

#### Optional Accessories

Pole ring, Extra lock and key