


8U ONU CABINET

PN: CM-601508

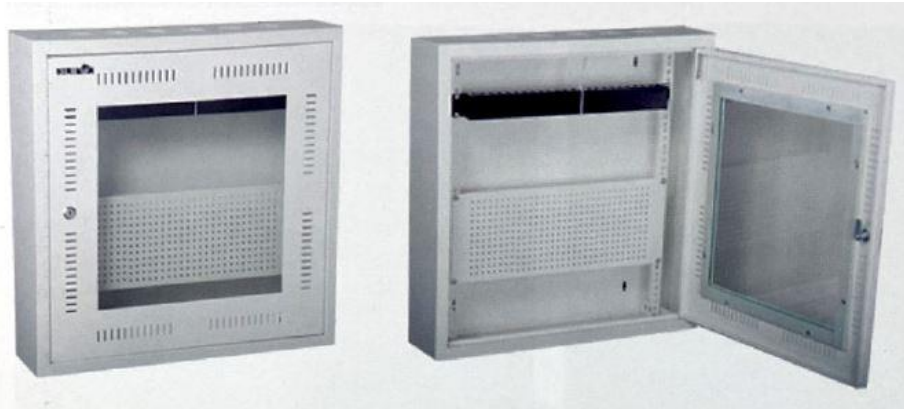

[Features]

- Single Section four frame tempered glass door.
- Wall mounted OR Flush Mounted Design.
- Advanced Technology Precise size.
- Quick and easy 19” standard installation.
- Total welded structure.
- Cable Entry from top and bottom with knock outs for Easy cable installation.
- IP Degrees: IP20.
- Flexible packing Methods allows for convenient stocking and end user delivery.
- Customization requests are available.

[Standard and Material]

Comply with ANSI/EIA; RS-310-D; IEC297-2; DIN41491 Part1
DIN41494 Part7; GB/T3047.2-92 standard; compatible with 19”
international standard, metric system and ETSI standard.

[Surface treatment]

Degreasing, pickling, phosphating and powder coating.

[Material]

SPCC Cold Rolled Steel

[Thickness]

Mounting profile 1.5mm;

[Color]

RAL9004 (black) – RAL7035 (Grey)

Model	Width	Depth	Height
CM-601508	400	150	600

