

Product name: protect unit

Product NO. : NSA-6073

Character:


- Lighting protect adapt to block module distribution frame , distribution case and distribution box , Which protect program - controlled exchange and operator security , And whose over current and over voltage satisfy CCITT advice.

Base structure


- 3 pole gas tube arrester equipped in lighting protector to protect over voltage , Over current adopt international pop PTC insurance resistance
- Over current and over voltage adopt auto-resume unit so which needn't change usually.

Item	Description	Specification
1	DC Sparkover (rate of rise of voltage @100V/s):	230V,±20%
2	Impulse Sparkover Voltage (rate of rise of voltage @ 1kV/ μ s):	700V
3	PTC trip-current (@ 230Veff):	4Arms
4	PTC Initial Resistance :	R min 5(ohms), R max 12(ohms)
5	Impulse Discharge Current (@ wave 8/20 μ s):	10Application(per side 2.5KA)
6	Insulation Resistance (@ 100Vdc):	> 1000M Ω
7	Failsafe Operation (@ 1Arms):	<25 sec
8	Storage Temperature Range:	-20 ~+80° C
9	Operating Temperature Range:	-20 ~+60° C
10	Max. Operating Voltage:	180V
11	Max. Operating Current:	120mA
12	Capacitance(@ 1KHz freq/0.5v):	<2.0 pF
13	Dielectric Strength:	1.75KV

Diagram:

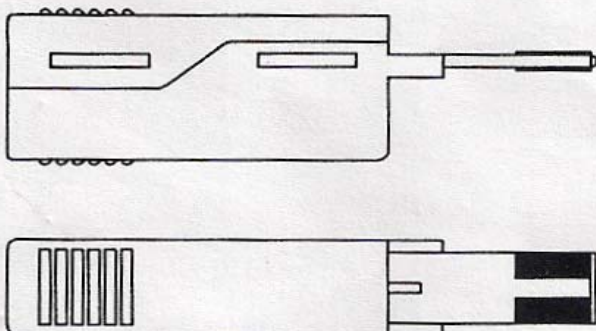

Electric Layout:

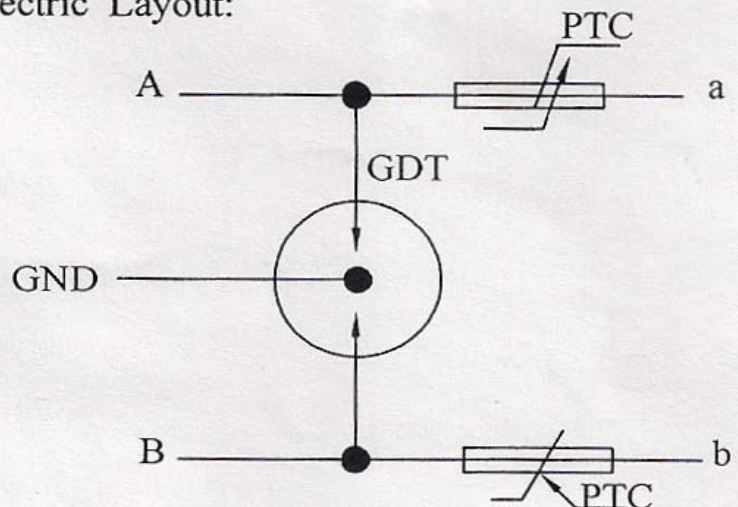

HONG KONG (HK) Limited

Unit 1303, 13/F, Beverly House, 93 -107 Lockhart Road, Wanchai, Hong Kong.
 香港灣仔駱克道93107-號利臨大廈13樓1303室

Tel. : (852) 28639635 Fax : (852) 21296534 Mob. : (86) 18218762001

EGYPT

15 Sakalia St., From Makram Abeed, 3rd Floor, Nasr City, Cairo, Egypt.

Tel. : +202 2671 8862 / 3 Fax : +202 2275 2976 Mob. : +2012 2213 3810